

GE APPLIANCES

RealMAX™

RESIDENTIAL
ATMOSPHERIC GAS WATER HEATERS

2023 PRODUCT GUIDE



Scan here to learn
more about the
full line of water
heater solutions



GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS



GE APPLIANCES RealMAX™ HAS ARRIVED— BRINGING THE GE APPLIANCES ADVANTAGE WITH IT


The atmospheric gas water heaters in the GE RealMAX™ series are cutting-edge products that give families real capacity and maximum performance, and give professionals the kind of support that only GE Appliances can offer. With a distribution network second to none and a training and customer-service team dedicated to making your life easier, RealMAX™ is a game changer.

GE RealMAX™ ATMOSPHERIC GAS WATER HEATERS: MAXIMUM BENEFITS



GE APPLIANCES


A BRAND WITH A HERITAGE
Consumers know and trust GE Appliances for durability, quality, and innovation.

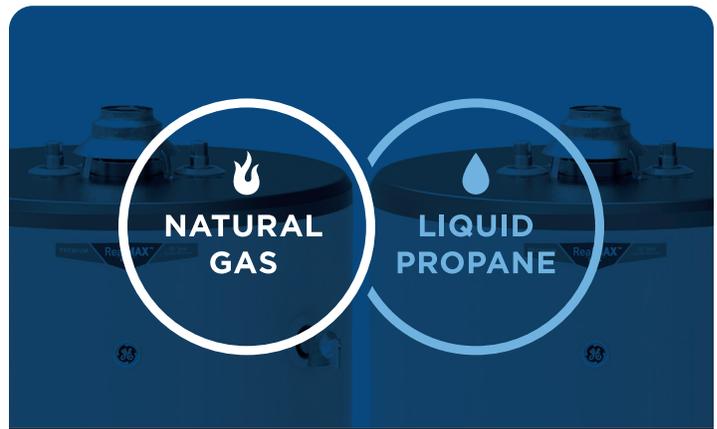

NATURAL GAS


LIQUID PROPANE

A CHOICE OF POWER SOURCES
Natural gas or liquid propane.



MAXIMUM CAPACITY AND PERFORMANCE

A true 30, 40, and 50 gallons of hot water. 40K BTUs on select 40- and 50-gallon natural gas units provide quick recovery and maximum performance.



MAXIMIZED DISTRIBUTION NETWORK

GE Appliances' unparalleled network offers maximized supply-chain efficiencies.



SUPPORT TO THE MAX

Our commitment to the industry means that we want you to succeed – and through top-notch customer support and training, we aim to be your partner for the long haul.


INNOVATION TO THE MAX

GE Appliances' investment in the future includes a \$70 million, 259,000-square-foot, high-volume water heater production facility in Camden, South Carolina. It's the first new tank-style water heater plant built in the U.S. in more than 30 years, and it's driven by cutting-edge technology. RealMAX™ water heaters and allied products will be made in the USA*, by GE Appliances experts, in this state-of-the-art facility.



* 70-90% US content

TANK FEATURES

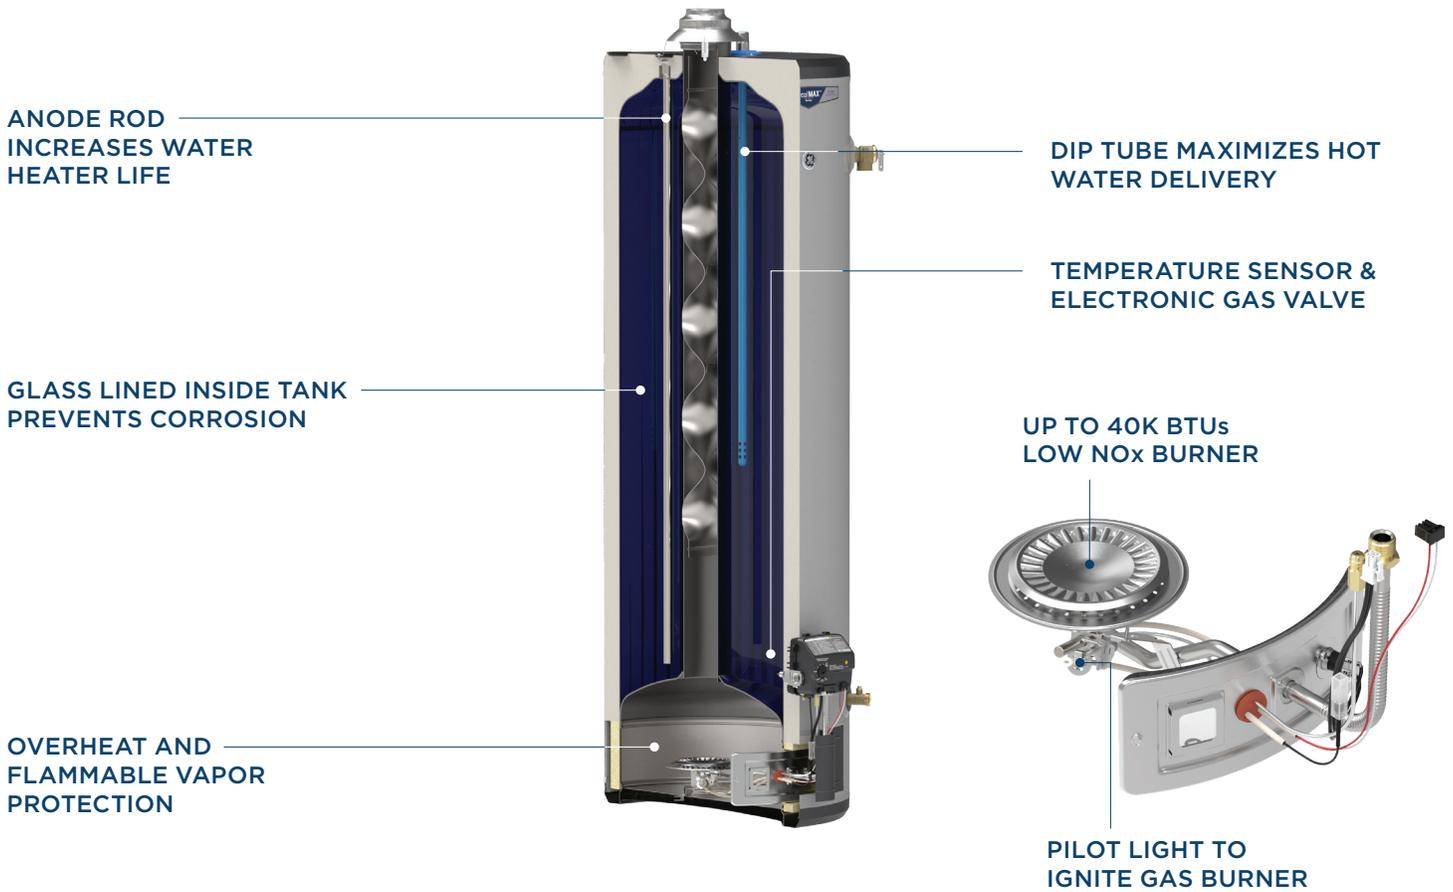

ATMOSPHERIC GAS FEATURE HIGHLIGHTS



CAPACITY, HEAT & RECOVERY

The products in the RealMAX™ series are real-capacity heaters – they actually contain the water volume they claim to. They hold a true 30, 40 and 50 gallons of water – plus quick recovery (40K BTUs on select 40/50G natural gas units).



CONTROLS DESIGNED FOR PEACE OF MIND

RealMax™ series water heaters have safety built in. The SmartShield™ system automatically shuts off the unit if abnormal ambient temperatures are detected, and the self-diagnostic feature reports on gas system status via an LED indicator.



BUILT-TO-LAST WARRANTIES

RealMAX™ water heaters carry tank and parts limited warranties of 8 years (Choice model), 10 years (Premium model), and 12 years (Platinum model). Compare that with most standard warranties, which run 6, 9, and 12 years.

ATMOSPHERIC GAS SPECIFICATIONS

GE REALMAX ATMOSPHERIC NATURAL GAS WATER HEATERS



GE						
	GG30S08BXR	GG30T08BXR	GG40S12BXR GG40S10BXR GG40S08BXR	GG40T12BXR GG40T10BXR GG40T08BXR	GG50S12BXR GG50S10BXR GG50S08BXR	GG50T12BXR GG50T10BXR GG50T08BXR
Rated + Nominal capacity (gallons)	30/30	30/30	40/40	40/40	50/50	50/50
FEATURES						
Family size*	1-3	2-3	2-4	2-4	3-5+	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature range	50-155° F	50-155° F	50-155° F	50-155° F	50-155° F	50-155° F
Drain valve type	Glass-filled nylon	Glass-filled nylon	Brass Glass-filled nylon Glass-filled nylon	Brass Glass-filled nylon Glass-filled nylon	Brass Glass-filled nylon Glass-filled nylon	Brass Glass-filled nylon Glass-filled nylon
WEIGHTS & DIMENSIONS						
Approx. shipping weight (lbs.)	118	119	140	147	172	169
Height to water connection (in.)	48-3/8	59-1/4	50-3/8	60	47-3/4	59-1/2
Tank dimensions (diameter x height) (in.)	20 x 46-7/8	18 x 57-3/4	22 x 48-7/8	20 x 58-1/2	25 x 46-1/4	22 x 58
Connection sizes - cold water inlet/hot water outlet (MNPT)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS**						
Input BTU/hr	34k	34k	38k	40k	40k	40k
First hour rate (gallons)	64	62	78	83	77	82
Uniform energy factor	0.6	0.6	0.64	0.64	0.63	0.64
WARRANTY						
Limited warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited

* Household sizing based on back-to-back showers, 8 minutes long.

** Certified by AHRI testing
Temperature setting factory default 120° F

GE REALMAX ATMOSPHERIC LIQUID PROPANE WATER HEATERS



GE					
	GP30S08BXR	GP30T08BXR	GP40S12BXR GP40S10BXR GP40S08BXR	GP40T12BXR GP40T10BXR GP40T08BXR	GP50T12BXR GP50T10BXR GP50T08BXR
Rated + Nominal capacity (gallons)	30/30	30/30	40/40	40/40	50/50
FEATURES					
Family size*	1-3	2-3	2-4	2-4	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature range	50-155° F	50-155° F	50-155° F	50-155° F	50-155° F
Drain valve type	Glass-filled nylon	Glass-filled nylon	Brass Glass-filled nylon Glass-filled nylon	Brass Glass-filled nylon Glass-filled nylon	Brass Glass-filled nylon Glass-filled nylon
WEIGHTS & DIMENSIONS					
Approx. shipping weight (lbs.)	118	119	140	147	169
Height to water connection (in.)	48-3/8	59-3/8	50-3/8	60	59-1/2
Tank dimensions (diameter x height) (in.)	20 x 46-7/8	18 x 57-7/8	22 x 48-7/8	20 x 58-1/2	22 x 58
Connection sizes - cold water inlet/hot water outlet (MNPT)	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS**					
Input BTU/hr	31.5k	28k	34.5k	36k	36k
First hour rate (gallons)	64	52	78	83	82
Uniform energy factor	0.6	0.6	0.64	0.64	0.64
WARRANTY					
Limited warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited

* Household sizing based on back-to-back showers, 8 minutes long.

** Certified by AHRI testing
Temperature setting factory default 120° F



See http://info.nsf.org/Certified/Lead_Content/
for specific model listing



100% U.S. CONTENT | GEAPPLIANCES.COM/USA



GE APPLIANCES

Appliance Park
Louisville, KY 40225

geappliancesairandwater.com

©2023 GE Appliances

OTGEA22447
Pub. No. 9-H0120-23