




CARMEL™ AC2030TNA

TOP VENT GAS WALL HEATER



20,000 - 30,000 BTU/hr.
(Heat rooms up to 1,000 sq. ft.)

- Programmable thermostat included for energy savings and comfort:



- Easy to use
- Dynamic response
- Programmable heating schedule
- Shows date and time
- Manual and auto modes

The future is here. Introducing the Next Generation high performance, affordable, vented wall furnace heating solution. The CARMEL™ AC2030TNA Top Vent Gas Wall Heater offers traditional home comfort with lower heating costs, convenience and high efficiency. Easily recessed or surface-mounted options are great in homes, schools, cabins, apartments, offices and shops.

Heating rooms individually allows comfort in areas being used while saving fuel costs in unused areas.

FEATURES

- Superior comfort and efficiency with 82% AFUE
- Ultra low NOx emissions
- Dynamic Response - for energy savings and a constant and comfortable temperature - just enough heat for your desired environment.
- No standing pilot - eliminates seasonal relighting, saves energy and eliminates methane emissions.
- Easy to install
- Quiet fans offer improved comfort and air circulation
- Reduced carbon footprint - fits into the same opening and uses the same venting as the traditional Monterey wall furnace.
- Power kit required. Select between:
 - AC Power Supply Kit (M119046)
 - External Power Supply Kit (M119015)



M119015



M119046



CARMEL™ AC2030TNA TOP VENT GAS WALL HEATER

MODEL NUMBER	BTU/hr. INPUT	BTU/hr. OUTPUT	EFFICIENCY PERCENT	DIGITAL THERMOSTAT (INCLUDED)	POWER
NATURAL			AFUE		
AC2030TNA	30,000	25,428	82%	PROGRAMMABLE	115V-60 HZ, 1 PHASE, LESS THAN 5.0 AMPS (dedicated circuit not necessary)
MODEL DIMENSIONS		WIDTH	DEPTH	HEIGHT	WEIGHT (LBS.)
FURNACE DIMENSIONS (INCHES)		16	6	65 3/4	106
SHIPPING DIMENSIONS (INCHES)		17 1/2	11	71	120

Settable elevation rating from sea level (0) to 4,500'

1/2" Gas Connection



FEATURES

CONTEMPORARY FINISH

Soft-white, powder-coat, heat-resistant finish to compliment any decor.

INTERIOR FURNACE CLEARANCES

- 1" from an intersecting wall.
- 16" from the top of the appliance to the ceiling or other obstructions.
- 48" from the furnace front to draperies, furniture or other obstructions, or other combustibles.
- 2 1/2" from finished floor.

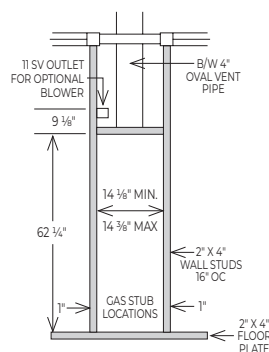

WARNING: This product can expose you to chemicals including epichlorohydrin which is known to the State of California to cause cancer and birth defects and/or other reproductive harm. For more information go to www.p65warnings.ca.gov

IMPORTANT

- ANY WARRANTY CONSIDERATIONS ARE CONTINGENT ON INSTALLATION BY A QUALIFIED INSTALLER (CONTRACTOR). SELF-INSTALLATION IS PROHIBITED AND WILL INVALIDATE YOUR WARRANTY.**
- Read owner's manual before using/installing.
 - Photographs are representative only.
 - Check local codes and ordinances for permitted uses.
 - Consult installation manual for clearances prior to installation.
 - We reserve the right to amend product specifications without notice.
 - Installation and servicing recommended by a qualified service person.
 - Please read the warranty for any limitations of disclaimers. Combustion chamber carries a 10-year limited warranty. All other parts carry a one-year limited warranty.
 - Venting must comply with the "Venting and Chimney Requirements" section of the instruction manual.

ACCESSORIES

REAR-OUTLET REGISTER

Register flush on rear wall, adjusts amount of heat delivered through rear register. Motorized rear outlet register for increased airflow also available. **Model 6920** - Motorized model for surface mounted installation. Shipping weight 10 lbs.



POWER SUPPLY KIT (REQUIRED)

AC POWER SUPPLY KIT

Internal AC power with 4-foot power cord. **Model M119046** - Shipping weight 1 lb.



EXTERNAL POWER SUPPLY KIT

If M119046 is not long enough to reach an outlet, this kit can be used to wire through the wall and into the home's power supply. **Model M119015** - Shipping weight .54 lbs.



OVAL-VENT STARTER KIT

Contains hold down plate, oval-to-round adapter, spacer plates and two pieces of 2-foot length of oval pipe. **Model 9929** - USA
Model 9930 - Canada
Shipping weight 9 lbs.



REPLACEMENT FACE PANEL

Soft white powder coat face panel **Model 4915** - Shipping weight 30 lbs.

FREE-STANDING KIT

Allows single sided furnaces to be surface mounted instead of recessed. Ideal for remodeling in existing masonry construction or when studs are substandard (*furnace and face panel not included*). **Model 4901** - Shipping weight 23 lbs.

