




GE APPLIANCES
a Haier company

CustomerNet

GE Zoneline® Heat Pump Fixed Speed Unit with Corrosion Protection

15,000 BTU, 230/208 Volt

Model# AZHS15DCXXA

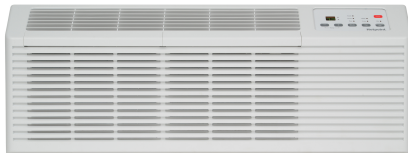

- R454B - Most environmentally friendly refrigerant on the market
- Heat pump down to 25°F
- Boost heat option
- Electronic touch controls with LED display
- Quiet Operation - baked on mastic sound barrier
- Corrosion protection package
- SMC basepan and bulkhead
- Electronic temperature limiting
- Fresh air vent

FEATURES

Zoneline Features	"Sleep" Mode "Smart Fan" Fan Cycle Control 3-Stage Heating Design Auto Power Recovery Automatic Emergency Heat Automatic Indoor Frost Control Central Desk Control Compatibility Freeze Sentinel Heat Pump with Resistance Heat Backup Heat Pump with Supplemental Resistance Heat Heat Sentinel Proportional - Integral ID Airflow Quick Heat Recovery Random Twist/Length Segment Tangential Blower Remote Thermostat Compatibility Reverse Cycle Defrost Universal Heaters Weather Protected Electrical Components
Louver Style	Reversible
Control Type	Standard Microcomputer Tactile touch pad with LED Display
Discharge Grille	2-position
Fan Speed Selections	Hi/Low Cooling Hi/Low Fan Only Hi/Low Heating
Sensible Heat Ratio	60%
Power Factor	97
Product Type	Packaged Terminal Air Conditioners (PTAC)
Refrigerant Type	R454B
Filter Type	Rigid Frame Slide-Out
Manual Vent Control	Hidden
Chassis Type	Slide-In
Fan Motor	2
Temperature Limiting	Electronic 7-Step
Fan Speed Control	Yes
Temperature Range	60 - 85 F
Corrosion Treated	Yes
Heat - Cool	Yes
Electronic Micro Computer Control	Yes
Fan Cycle Switch	Yes
Central Desk Control Compatibility	Yes
Rotary Compressor	Yes
Heating - Reverse Cycle - COP	3.3/3.3
Vent Control	3-position
Venting Features	Concealed Manual Vent Control

	Outdoor Vent Control - 3 Positions
	Vent Air Filter
Heating System	Heat Pump

Have more questions? Please contact 1-800-626-2000



GE APPLIANCES
a Haier company

CustomerNet

GE Zoneline® Heat Pump Fixed Speed Unit with Corrosion Protection 15,000 BTU, 230/208 Volt Model# AZHS15DCXXA

APPROXIMATE DIMENSIONS(HxDxW)

- 16 H x 42 W x 20 13/16 D

CAPACITY

- Cooling BTUH (MAX) - 15100.00Btu
- CFM Indoor Fan Low - 330
- CFM Indoor Fan High - 495
- Cooling EER (BTUH / Watt) - 10.4 / 10.4
- Dehumidification (pts./hr.) - 4.1 (High Speed)
- Vent CFM (high fan at zero ESP) - 33
- Cooling BTUH (MIN) - 14700Btu

APPEARANCE

- Color Appearance - Grey White

WEIGHTS & DIMENSIONS

- Overall Width (in) - 42in
- Approximate Shipping Weight (lb) - 118lb
- Overall Height (in) - 16in
- Overall Depth (in) - 20 13/16in
- Net Weight (lb) - 108lb

POWER / RATINGS

- Cooling - Amperes; L.R. - 31.5
- Heating - Reverse Cycle - Watts - 1195/1180
- Cooling - Amperes; F.L. - Cooling - 6.2/6.7
- Cooling - Amperes - 6.2/6.7
- Cooling - Watts - 1390/1360
- Heating - Reverse Cycle - Amps - 5.4/5.7
- Voltage (MIN) - 208V
- Heating BTUH - 13500 / 13300
- Voltage (MAX) - 230.000000V

ACCESSORIES

- Accessories Required for Installation - RAB42 - Wall Case

WARRANTY

- Warranty Notes - See written warranty for full details
- Labor Warranty - Limited 1-year entire appliance
Limited 5-year sealed refrigerating system
- Parts Warranty - Limited 1-year entire appliance
Limited 5-year sealed refrigerating system

CERTIFICATIONS

- Claims & Certifications - California Prop 65
UL
AHRI
CUL
NRCAN

Have more questions? Please contact 1-800-626-2000