





Manufactured to **PAIKIN** specification

- Engineered in partnership
- > Best-in-class reliability, manufactured specifically for condensate removal
- Patented 5 gph pump technology
- Specific wiring schematic for Daikin models (see reverse page)
- > Complete with Drain Safe Device

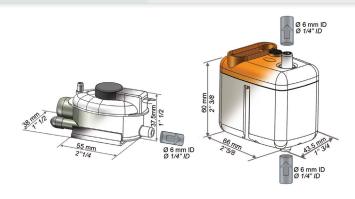

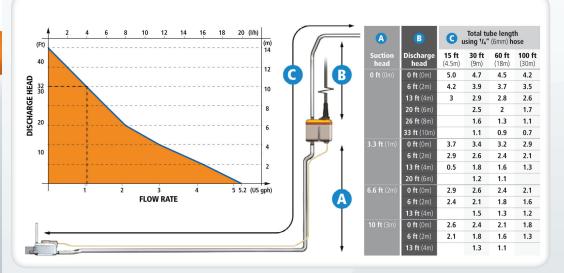



ONE PUMP

One pump suitable for ALL Daikin models from 0 to 42 kBtu/hr (12.5 kW - 3.5 tons*)

- 5 gph
- High capacity, less run time = RELIABILITY
- * The indicated 3.5 ton rating applies to approved Daikin models. The performance rating of the Si-30 pump allows for use on units up to 5.6 tons



SILENT OPERATION

- High performance with low operating sound levels
- Flexible & Easy to install and maintain
- Ideal for Bedroom use



COMPLETE INSTALLATION KIT INCLUDED

Everything you need for a complete installation

- Unique self sealing discharge fitting included
- Drain Safe Device
 Combines mechanical and gravity drain
 Allows condensates to clear efficiently, keeping the pump primed at all times.





DACA-CP3-1


Wiring instructions

Si-30



(230 V) Mini & Multi-Split, SKYAIR & QUATERNITY INDOOR UNITS

Models: (FTXS09, 12, 15, 18, 24, 30, 36 LVJU) (FTXN09, 12 KEVJU) (FTXN15, 18, 24 KVJU) (FTXG09, 12, 15 HVJU) (CTXS07 HVJU) (CTXS07 LVJU) (CTXS09,12 HVJU) (FDXS09, 12 DVJU) (FDXS09, 12 LVJU) (CDXS15, 18 LVJU) SkyAir: FTXS30, 36 LVJU

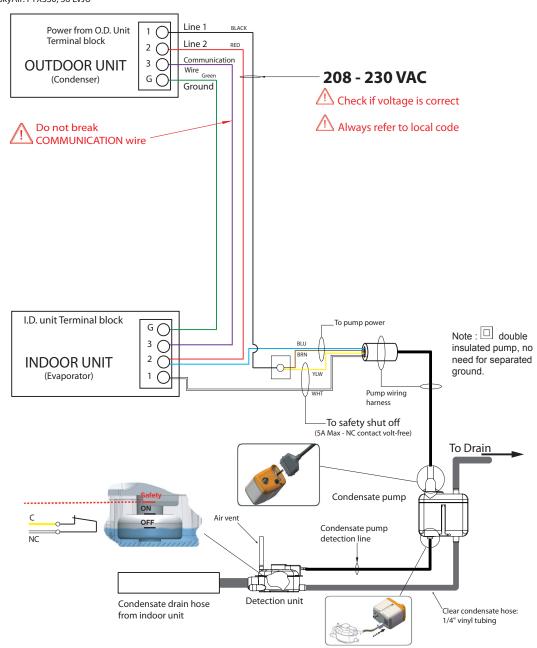





DACA-CP3-1

(230V) VRV & SKYAIR SERIES INDOOR UNITS

Models with **GREEN** jumper:

SkyAir: (FHQ18, 24, 30 PVJU) (FHQ36, 42 MVJU)

VRV: (FXHQ12, 24, 36 MVJU) (FXLQ12, 18, 24 MVJU) (FXNQ12, 18, 24 MVJU)

Wiring instructions

Si-30

(230V) VRV & SKYAIR SERIES IN

Models with <u>WHITE</u> jumper: SkyAir: (FAQ18, 24 PVJU)

