

## ECOi™ Submittal Data

### S-24MK1U6

Indoor Unit: Wall Mounted

Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Previous Model Number: KHX2452

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit#: \_\_\_\_\_  
 Drawing#: \_\_\_\_\_


Capacities	
Cooling: Btu/h	25,000
Heating: Btu/h	27,000
Sensible Heat Ratio	0.67
Cooling Mode Nominal Conditions	
Indoor: °F DB/°F WB	80/67
Outdoor: °F DB	95
Pipe Length: Feet	25
Level Difference: Feet	0
Heating Mode Nominal Conditions	
Indoor: °F DB	70
Outdoor: °F DB/°F WB	47/43
Pipe Length: Feet	25
Level Difference: Feet	0
Refrigerant and Piping	
Refrigerant Type	410A
Metering Device (Electronic Expansion Valve)	EEV
Liquid Piping (Inches)	3/8
Gas Piping (Inches)	5/8
Condensate	
Drain Piping (OD) Inches	3/4
Fan	
Type	Crossflow
Drive	Direct
Fan Motor Output: W	30
Airflow rate (L/M/H)	353/495/563
Power Supply	
V/PH/Hz.	208/230/1/60
Minimum Circuits Amps (MCA): Amps	15
Nominal Power Input - Cooling (W)	72/83
Full Load Amps	0.39
Max. Overcurrent Protection (MOCP)	15
Nominal Power Input - Heat (W)	72/83



Weight	
Weight: (lbs)	46
Sound Data	
Sound Level (H/M/L) 5' below unit	42/38/35
Coil	
Coil Face Area: (sq. ft.)	2.37
Number of Rows	2

Parts Warranty: One Year
Washable Filters
Wired or Wireless Remote Control
Remote Sensor Option

# Dimensions

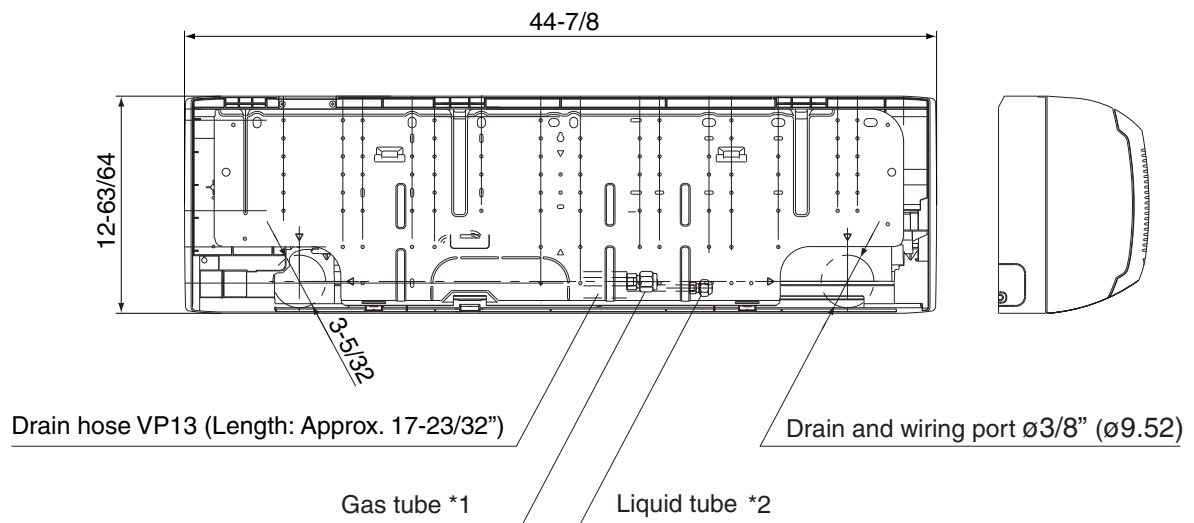

\*1 Type 18,19 :  $\phi 1/2$ " ( $\phi 12.7$ ) (Length: Approx. 19-11/16")  
Type 24 :  $\phi 5/8$ " ( $\phi 15.88$ ) (Length: Approx. 19-11/16")

\*2 Type 18,19 :  $\phi 1/4$ " ( $\phi 6.35$ ) (Length: Approx. 22-7/16")  
Type 24 :  $\phi 3/8$ " ( $\phi 9.52$ ) (Length: Approx. 22-7/16")

# Panasonic

Panasonic North America  
Air Conditioning Division  
1690 Roberts Blvd., NW, Suite 110  
Kennesaw, GA 30144  
<http://www.panasonic.com/aircon>